



Available finish:- Anthracite

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP65     240V~50Hz 2x24W

These fittings are Class I and must be Earthed

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply. Any faulty, broken or damaged luminaires should be replaced immediately.

KSR will not accept responsibility for any claims arising from a poor installation.

Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature (normal operating ambient temperature -10 - +35°C), humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice

Always switch off mains supply before servicing.

This luminaire is suitable for outdoor use and requires regular cleaning maintenance to preserve the products finish and light output. Do not use Megger or similar high voltage instruments. Due to the fact this luminaire contains electronic components that maybe damaged by high test voltages, they must be disconnected from the circuit before testing.

To prevent damage to the driver, do not mix with conventional magnetic ballasts on the same electrical circuit.

At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation

Installation Procedure

Familiarize yourself with the luminaire/installation procedure and ensure the power is safely isolated before installing the luminaire.

Locate suitable area(s) for the installation

Release locking screw located on the back of the fitting and when loosened gently pry back plate away from Body

Using the fixings provided drill and prepare two fixing holes for the base plate to locate onto.

Now with base plate in place fasten both fixing screws until base is secured to surface



Now pull supply cable through cable grommet provided, ensure cable is pulled through a small opening in the grommet, it is recommended that you use the the end of screwdriver and that a cutting knife is not used (to ensure a good seal around cable).


If loop in loop out wiring is required please use secondary opening located next to cable grommet initially used

Terminate the wiring L-Live (Brown), N-Neutral (Blue) and E-Earth (Green/Yellow) into terminal block, in addition to earth terminal wiring connect earth fly lead to tab fitted to base plate

Now replace body onto base plate and fasten screw to secure in place

Turn on the power and test the luminaire.

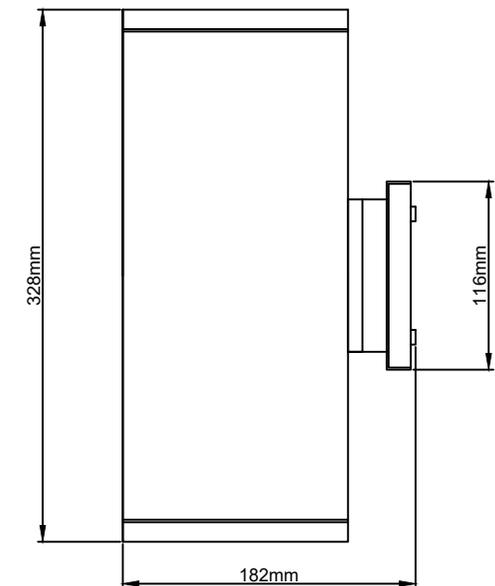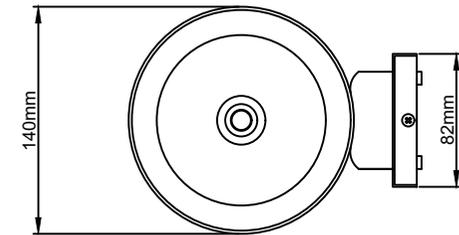

	Lamp Details 2x24W LED Module, 6383 Lumens 3000K Warm White
	The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced



KSR Lighting Aftersales: 023 92 674343

E-mail: aftersales@ksrlighting.com