



Available finishes: White

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP20 240VAC~50Hz 1.5W

These fittings are Class II and should not be Earthed

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply. Any faulty, broken or damaged luminaires should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation. Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice

Always safely isolate the mains supply before installing/servicing. Please note this luminaire is Non Dimmable. General maintenance and cleaning should be performed at least quarterly. Clean product outer using a damp cloth, the glass can be cleaned with hot soapy water, dried and buffed to a shine. At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.

Installation Procedure

Check that the luminaire is suitable for the intended application. Make sure mains power is switched off.


Recessed Mounting:

Remove the fitting from the surface box provided, the surface box can be disposed off. Drill a 58mm (+/-2mm) to receive the fitting. Connect the mains cable as per the guide below and push the fitting into the cutout taking care to dress the cables and prevent any being snagged.


Surface Mount:

Fix the base to the surface using suitable fixings for surface type. Terminating the mains wiring, this should be done outside the surface box. Push luminaire(s) back in to the surface box.

Turn on mains power and ensure luminaire(s) is(are) working correctly.

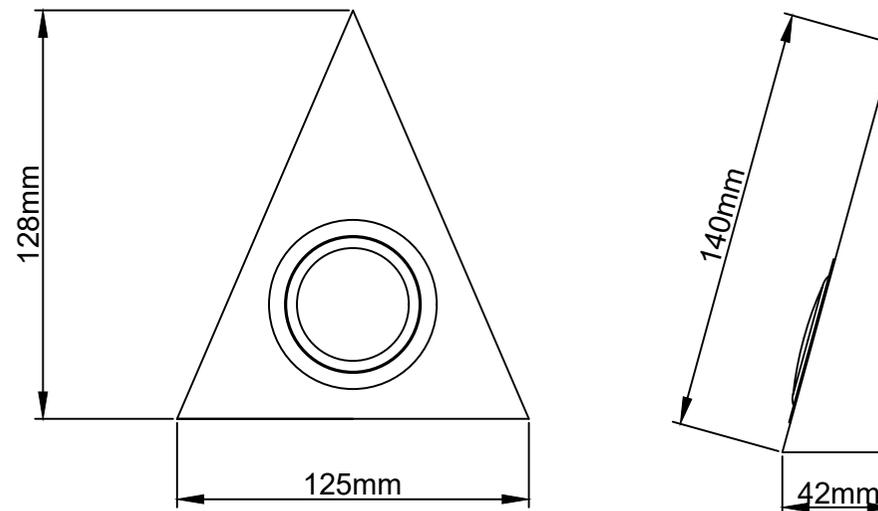

<p>Luminaire Details</p> <p>KSRCL172 - 3000k 1.4W 110 Lumen</p>
<p>The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced</p>

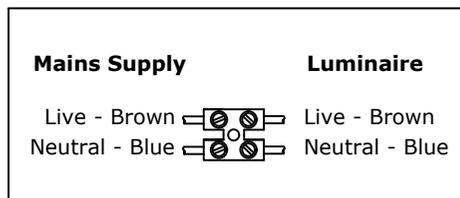

KSR Lighting Ltd, Optimum House, Beeding Close, Southern Cross Trading Estate, Bognor Regis, West Sussex, PO22 9TS.

KSR Lighting Aftersales: 023 92 674343
E-mail: aftersales@ksrlighting.com