Installation Sheet)KSR7191

retain them for future reference. Read these instructions before commencing installation &

|P55 ⊕ **(€** (]o.3m|€ 240V 15W

These fittings are Class I and must be Earthed

Important Information

ensuring the installation complies with current IEE wiring regulations & local building KSR will not accept responsibility for any claims arising from a poor installation control. These products are designed for connection to a 240V 50Hz supply. Any broken or damaged parts should be replaced as soon as possible. t is recommended that luminaires are installed and fitted by a qualified electrician

General Maintenance

heavy deposits. After any maintenance, remember to check all seals are intact Clean product outer using a damp cloth. Non abrasive cleaner can be used for General maintenance and cleaning should be performed at least quarterly.

Installation Procedure

before installing the fitting. Familiarize yourself with the luminaire and ensure the power is turned off

Ensuring the two cable entry points are towards the top offer the base base section. Remove the mounting plate from the fitting Unscrew but do not remove the grub screw from the underside of the

Drill the fixing points and secure base to the wall, dressing supply cables plate up and mark the two fixing points. though the grommets

(Green/Yellow) Terminate the wiring L-Live (Brown), N-Neutral (Blue) and E-Earth

Hook the main luminaire onto the base plate and tighten the grub screw.

Adjust the head section to the required position. Turn on the power and test the luminaire.

This Luminaire is Non Dimmable

Note: This luminaire requires a 240v AC supply, no external driver is


Mains Supply Luminaire







Available finish:- Anthracite Finish

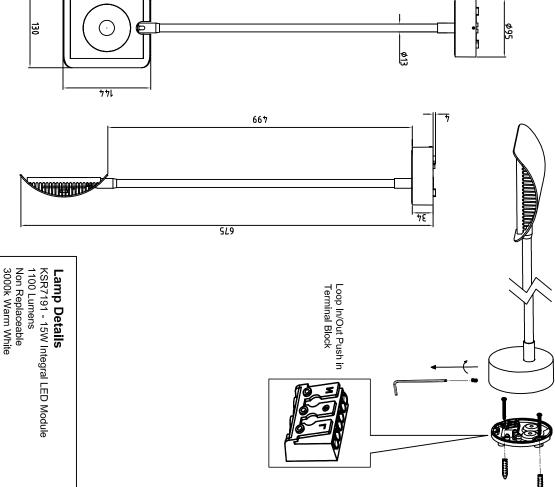

KSR Lighting Aftersales: 023 92 674343 E-mail: info@ksr-lighting.co.uk